
2024 VULCAN® S





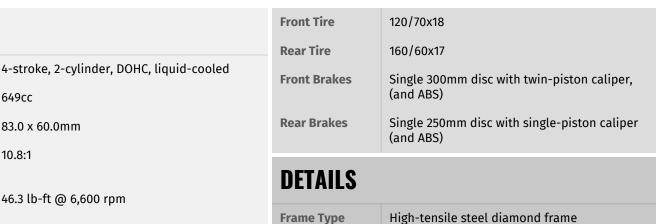

POWER

	Engine	4-stroke, 2-cylinder, DOHC, liquid-cooled		
	Displacement	649cc	Front Brakes	Single 300r (and ABS)
	Bore x Stroke	83.0 x 60.0mm	Rear Brakes	Single 250r (and ABS)
	Compression 10.8:1 Ratio			
	Maximum	46.3 lb-ft @ 6,600 rpm	DETAILS	
	Torque		Frame Type	High-tensil
	Fuel System	DFI® with 38mm throttle bodies (2), with sub- throttle valves	Rake/Trail	31°/4.7 in
	Ignition	TCBI with Electronic Advance	Overall Length	90.9 in
	Transmission	6-speed with positive neutral finder	Overall Width	34.6 in
	Final Drive	Sealed chain	Overall Height	43.3 in
	Electronic Rider Aids	Economical Riding Indicator, Anti-lock Brake System (ABS)	Ground Clearance	5.1 in
			Seat Height	27.8 in
	PFRFNRMA	NCF	Court Marticles	(00 2 11+*//

PERFORMANCE

Front Suspension / Wheel Travel	41mm telescopic fork/5.1 in	Fuel Capacity Wheelbase	
Rear Suspension / Wheel Travel	Lay-down offset rear shock with linkage and adjustable preload/3.2 in	Color Choices Warranty	

	Frame Type	rightensite steet uidhonu hanne
sub-	Rake/Trail	31°/4.7 in
	Overall Length	90.9 in
	Overall Width	34.6 in
	Overall Height	43.3 in
ake	Ground Clearance	5.1 in
	Seat Height	27.8 in
	Curb Weight	498.3 lb* (ABS), 491.7 lb* (non-ABS)
	Fuel Capacity	3.7 gal
	Wheelbase	62.0 in
and	Color Choices	Pearl Sand Khaki/Ebony, Metallic Flat Spark Black
	Warranty	12 Month Limited Warranty

Scan with camera to view videos, key features and more.



*Curb weight includes all necessary materials and fluids to operate correctly, full tank of fuel (more than 90 percent capacity) and tool kit (if supplied). KAWASAKI CARES: Read Owner's Manual and all on-product warnings. Always wear a helmet, eye protection and proper apparel. Never ride under the influence of drugs or alcohol. Adhere to the maintenance schedule in your Owner's Manual. ©2025 Kawasaki Motors Corp., U.S.A. Specifications subject to change. Visit guatemala.kawasaki-la.com for full product details.